



SIZING GUIDE

SIZING CHART



SIZE	CABIN (Standing Space)		CUT-OUT (in shaft)		SLIDING DOOR (Width)	AREA (m ²)	RATED LOAD (kg)
	A/C	B/D	A/C	B/C			
V70S-1	990	830	1395	1190	800	0.82	400
V70S-2	890	930	1250	1290	700	0.83	400
V70S-3	1090	930	1450	1290	800	1.02	400
V70S-4	890	1030	1250	1390	700	0.92	400
V70S-5	990	1030	1395	1390	800	1.02	400
V70S-6	1090	1130	1450	1490	800	1.24	400
V70S-7	1190	1230	1550	1590	900	1.47	400
V70S-8	1190	1330	1440	1690	900	1.59	400
V70S-9	890	1330	1250	1690	700	1.19	400
V70S-10	890	1430	1250	1790	700	1.28	400

MAX # OF STOPS	8 Stops
MAX TRAVEL HEIGHT	20,000 mm
POWER SUPPLY	1 phase 220V / 3 phase 220 V / 3 phase 400 V
MINIMUM HEIGHT TOP FLOOR	2600 mm
BOTTOM PIT	100 - 120 mm
PRODUCT STANDARD	MD 2006/42/EC, EN81-41, certified by SIL3
DRIVE MODE	Screw-Drive
RATED POWER	2.9 kW
MACHINE ROOM	None (integrated solution)
DOOR OPENING	Side-Open, Sliding, A or C only
SPEED	0.15 m/s - 0.20 m/s
GLASS	Tempered and Laminated





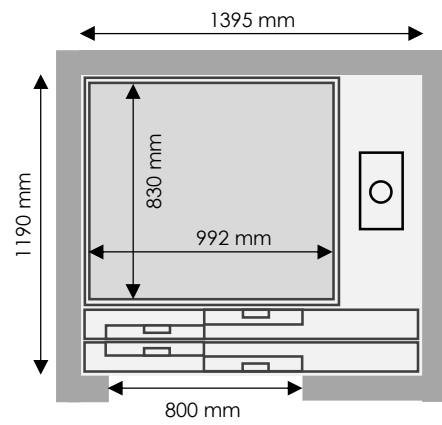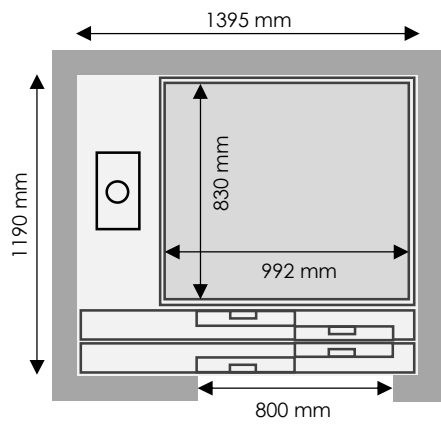



SIZE 1

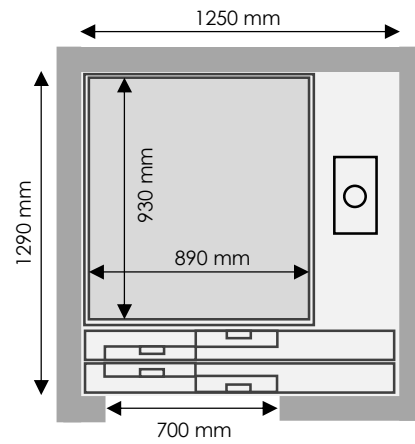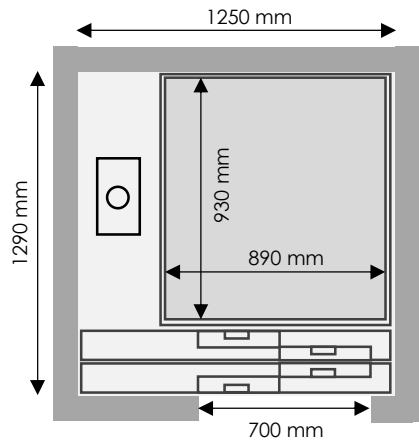

SIZE 2

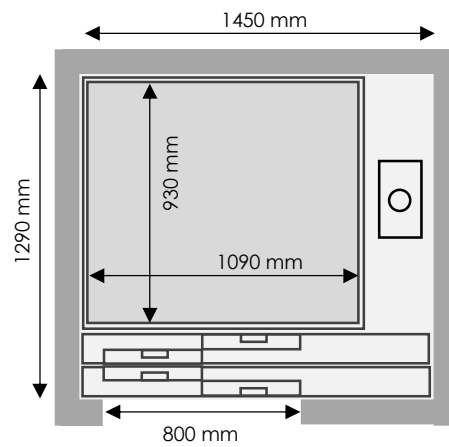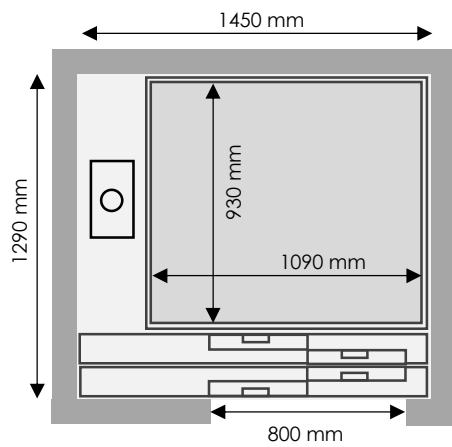



SIZE 3

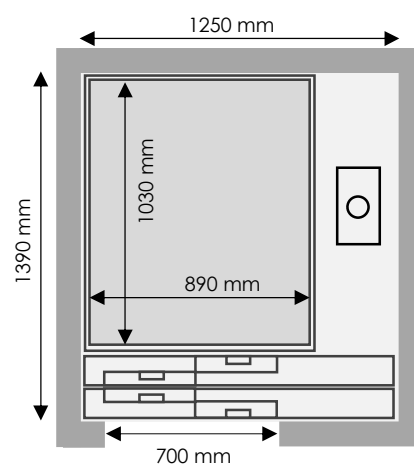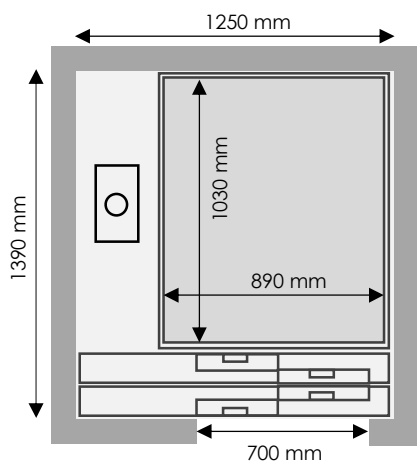



SIZE 4

SIZES & DIMENSIONS



SIZE 5

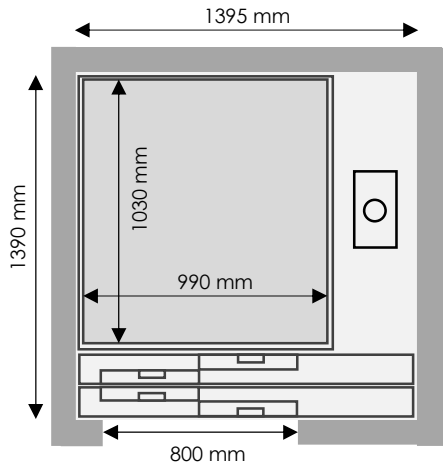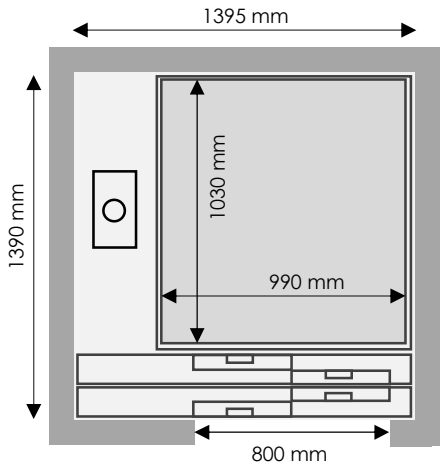



SIZE 6

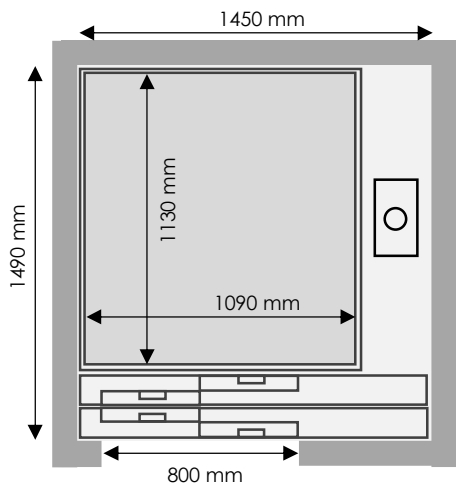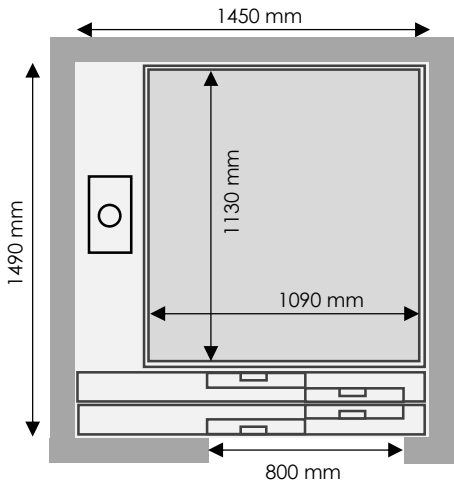



SIZE 7

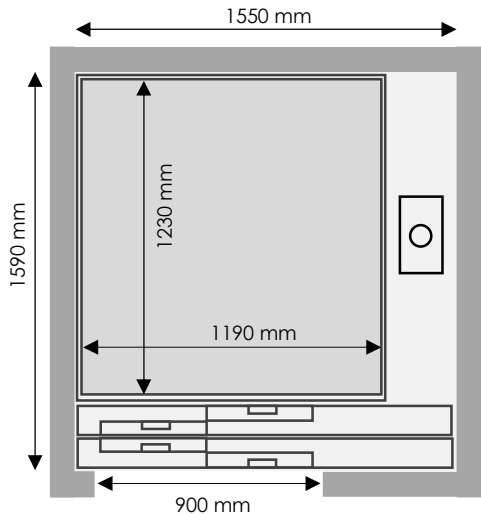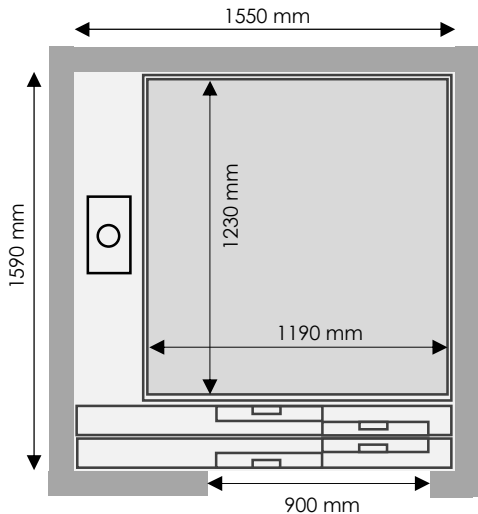



SIZES AND DIMENSIONS

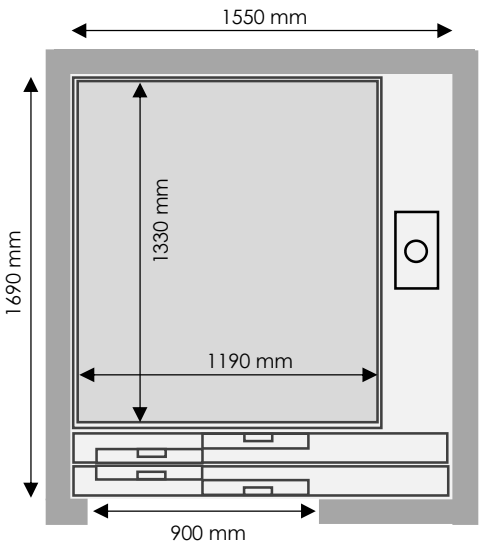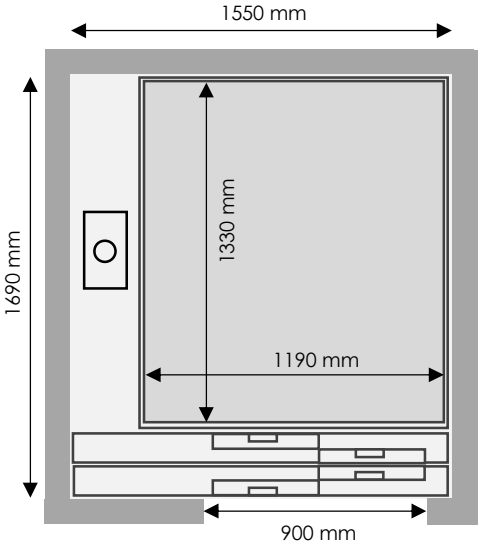

SIZE 8

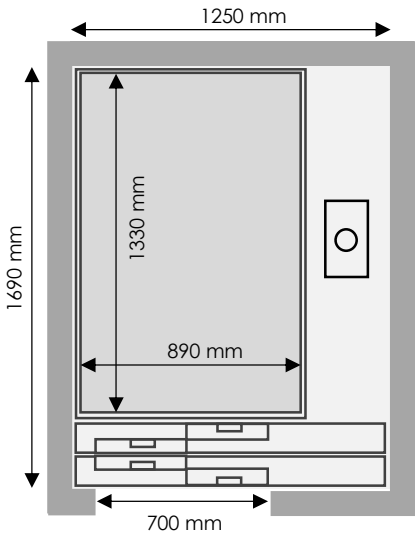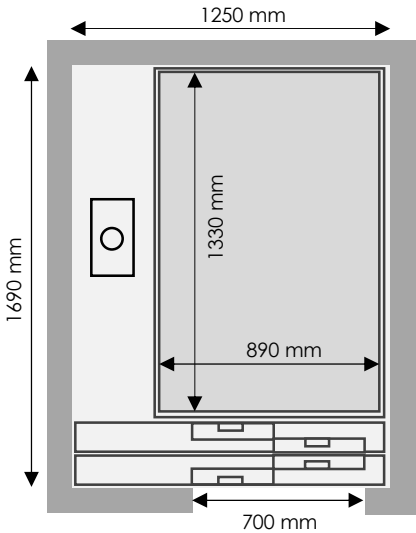

SIZE 9

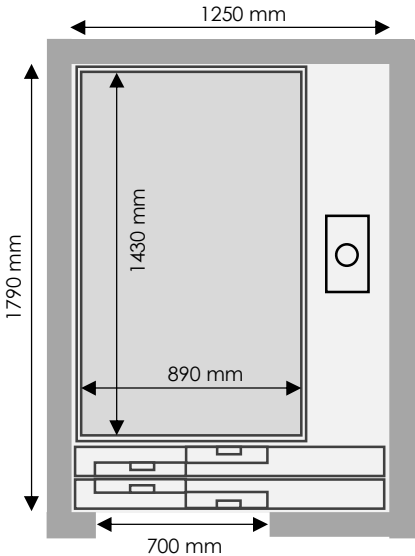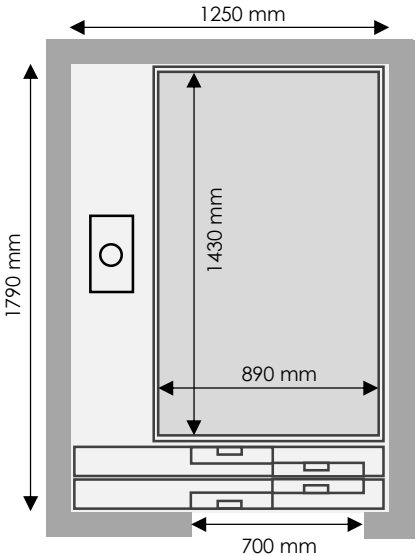

SIZE 10